

## FWL-2 PRESSURE-ONLY RELIEF VALVE



A.S.M.E. LISTED & RATED  
C.G.A. DESIGN CERTIFIED  
A.G.A. DESIGN CERTIFIED

### APPLICATIONS:

Tankless heaters or water heaters with energy cutoffs.

**SIZES:** 1/2", 3/4"

### FEATURES:

Bronze body, silicone seat disc, stainless steel spring and internals. Test lever is standard. Male inlet and female outlet.

### OPTIONS:

Factory setting is 75, 125, or 150 psi.


FOR MORE INFORMATION, WRITE OR CALL FOR BULLETIN RLF.

TYPE	SERIES	SIZE	CGA & AGA RATING	ASME RATING (at 125 & 150 psi)	SHIP. WT.
			btu/hr	btu/hr	lbs.
FWL-2	10	1/2"	15,000	N/A	1/2
FWL-2	10	3/4"	200,000	767,000	5/8

NOTE: As tested and rated by the National Board of Boiler and Pressure Vessel Inspectors - Section IV.

## NCLX-1, NCLX-5, NCLX-8

T&P RELIEF VALVES WITH "WHITE COAT" THERMAL ELEMENT

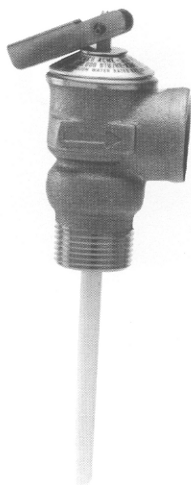

A.S.M.E. LISTED & RATED  
C.G.A. DESIGN CERTIFIED  
A.G.A. DESIGN CERTIFIED

### APPLICATIONS:

Intended for protection of hot water heaters and storage tanks.

**SIZES:** 1/2", 3/4"

### FEATURES:

Incorporates an innovative "White Coat" thermal element, an inert covering that provides effective isolation from mineral deposits (liming) and galvanic corrosion. Cast bronze body with male inlet

and female outlet, brass and stainless steel internal parts, silicone seat disc and stainless steel spring. Test lever standard. Temperature relief setting is 210°F (99°C).

### OPTIONS:

Factory-set relief settings are 125 or 150 psi. The 3/4" NCLX-5 is also available in 175 psi.

FOR MORE INFORMATION, WRITE OR CALL FOR BULLETIN RLF.

TYPE	SERIES	SIZE	ELEMENT EXTENSION LENGTH	AGA RATING	ASME RATING (at 125 & 150 psi)	SHIPPING WEIGHT
				btu/hr	btu/hr	lbs.
NCLX-1		1/2"	1-7/16"	15,000	N/A	1/2
NCLX-1		3/4"	1-7/16"	95,000	500,000	5/8
NCLX-5	5	1/2"	3"	15,000	N/A	1/2
NCLX-5	5	3/4"	3"	105,000	500,000	5/8
NCLX-5LS		3/4"	3"	105,000	500,000	5/8
NCLX-5LX		3/4"	3"	105,000	500,000	5/8
NCLX-8	4	3/4"	8"	105,000	500,000	5/8

NOTE: As tested and rated by the National Board of Boiler and Pressure Vessel Inspectors - Section IV.